

The Imitation of Intimacy: Comparing Satisfaction in Intimate Human and AI Companion Relationships

Annette Masterson
University of Michigan
Ann Arbor, USA
ammaster@umich.edu

Yiyang Li
University of Michigan
Ann Arbor, USA
sherriel@umich.edu

Xin Ye
University of Michigan
Ann Arbor, USA
xinye@umich.edu

Lionel Peter Robert Jr
University of Michigan
Ann Arbor, USA
lprobert@umich.edu

Abstract

The rapid proliferation of Large Language Models (LLMs) has enabled artificial agents to foster deep emotional bonds, yet the comparability of these AI relationships to human norms remains underexplored. As HRI researchers increasingly integrate LLMs into embodied platforms, understanding the nature of these bonds is imperative for responsible design. This study investigates whether relationships with LLM-driven AI companions can rival the satisfaction of human connections and if the mechanism of intimacy is equally critical. Through a comparative survey of 150 participants stratified across in-person, long-distance, and LLM companion relationships, we illuminate that digital bonds can yield satisfaction levels comparable to human partnerships, with intimacy serving as a predictive factor. These findings challenge the assumption that AI relationships are inherently unsatisfactory and identify intimacy as a design metric for social robots, providing a protocol for integrating LLM companions into embodied relational agents.

CCS Concepts

• **Human-centered computing** → **User studies; Interaction design; Interaction devices.**

Keywords

Intimacy, Large Language Models, Cross-Sectional Survey, Relationship Satisfaction

ACM Reference Format:

Annette Masterson, Xin Ye, Yiyang Li, and Lionel Peter Robert Jr. 2026. The Imitation of Intimacy: Comparing Satisfaction in Intimate Human and AI Companion Relationships. In *Companion Proceedings of the 21st ACM/IEEE International Conference on Human-Robot Interaction (HRI Companion '26)*, March 16–19, 2026, Edinburgh, Scotland, UK. ACM, New York, NY, USA, 6 pages. <https://doi.org/10.1145/3776734.3794515>

1 Introduction

The rapid integration of Large Language Models into interactive systems has fundamentally altered the landscape of artificial intelligence [54]. For the Human-Robot Interaction (HRI) community, these models represent a paradigm shift in communicative competence [25, 36], enabling agents to transcend scripted exchanges and engage in fluid, open-ended dialogue [10, 54]. This technological leap has fueled the proliferation of social chatbots designed specifically for emotional connection [23], and companionship [55]. Unlike task-oriented systems, these AI companions mimic human interaction dynamics [44], fostering deep emotional bonds that increasingly resemble interpersonal relationships—including friendship [30, 32] and romantic attachment [42].

While distinct from physically embodied robots, LLM-driven chatbots serve as a critical proxy for understanding future human-robot relational dynamics. As accessibility accelerates adoption and these language architectures are increasingly integrated into robotic platforms, understanding the nature of these digital bonds becomes imperative for HRI design [40]. Existing research has explored the utility of these agents in education [39], marketing and entertainment [14, 66], and mental health [8]. However, the rapid social acceptance of AI companions has outpaced our theoretical understanding of the relationships they generate. While scholarship acknowledges the existence of significant human-agent bonds [4, 42]—and potential risks regarding over-attachment in vulnerable populations [52]—there remains limited empirical research comparing the quality of these bonds against human norms [35, 65].

Critically, the field lacks a definitive understanding of whether a relationship with an LLM can genuinely rival the satisfaction and intimacy found in human connection. This study explores the mechanisms of intimacy and its impact on relationship satisfaction.

We conducted a comparative survey of 150 participants, stratified equally across three relationship conditions: long-distance human partners, in-person human partners, and LLM-driven companions. Preliminary results challenge the assumption that AI relationships are inherently inferior, indicating that AI companions can yield satisfaction and that intimacy remains a central predictive factor.

This study makes several contributions to the HRI literature. First, it empirically indicates the depth and satisfaction of human-LLM relationships, offering a benchmark against human social standards. Second, it highlights the importance of intimacy development as a design metric, linking it to the mitigation of loneliness. Finally, we



This work is licensed under a Creative Commons Attribution 4.0 International License. *HRI Companion '26, Edinburgh, Scotland, UK*
© 2026 Copyright held by the owner/author(s).
ACM ISBN 979-8-4007-2321-6/2026/03
<https://doi.org/10.1145/3776734.3794515>

discuss how these relational dynamics inform the evolution of AI interactions into fully embodied relational robots, providing a path for the next generation of social HRI.

2 Related Work

2.1 Intimacy and Relationships

To understand the potential of LLMs as relational agents, we must first operationalize the mechanisms that drive human connection. Intimacy is a dynamic exchange of information characterized by vulnerability and empathy between two individuals [27]. It relies on a foundation of closeness [5], trust and emotional connection [58], and the reciprocal disclosure of in-depth personal information [49]. The Intimacy Process Model [28] offers a critical theoretical framework; it posits that intimacy is a cyclical dialogue where the core of this process is the intensity of intimacy, grounded in the degree of perceived responsiveness [28].

Perceived responsiveness involves empathetic replies—which may be verbal or non-verbal—where the disclosing partner assesses the listener’s degree of understanding, validation, and care [7]. Crucially for HRI researchers, this model suggests that intimacy is a recognizable interactional pattern [49]. This development of emotional intimacy is inextricably linked to relational satisfaction.

High levels of intimacy predict relationship satisfaction and love, while declines precipitate dissatisfaction [3]. Although the components of satisfaction evolve—with sexual and recreational intimacy playing shifting roles depending on relationship duration [6, 59]—emotional intimacy remains a dominant predictor of long-term success. Furthermore, the subjective evaluation of disclosure directly mediates the level of intimacy achieved [47], emphasizing the perception of the responsiveness.

The mediation of intimacy through technology is already well-established in long-distance relationship literature. To compensate for physical separation, long-distance partners negotiate intimacy through technological channels, effectively mimicking in-person connections [2, 17, 38, 67]. This suggests that physical presence is not a prerequisite for deep connection. While we know AI can elicit self-disclosure [23], the extent to which these agents can replicate the full depth and comparable nature of intimacy remains a critical open question in HRI.

2.2 LLMs in HRI

The democratization of access to LLMs has precipitated a surge in their application across HRI and robotics [60, 64]. While viewed as a potential solution to longstanding natural language processing issues [57], the field is now grappling with the broader implications of their integration [36]. Current research has addressed functional utility in physical tasks [64] while expanding to explore interpersonal domains, including mental health diagnostics and support [46, 51], as well communication and self-disclosure [46, 51].

The intersection of LLMs and embodiment has serious implications for social robotics. New frameworks, such as Lin et al.’s [34] Intelligent Companion Robots, propose combining visual and physiological cues with emotional logic LLMs. This indicates interest within the HRI community toward honing emotional recognition in embodied agents [37]. However, this shift introduces complex relational challenges. Kim et al. [25] compared text and voice agents

to a social robot embedded with an LLM, finding that while the embodied LLM heightened user expectations for emotive competence, lapses in logical consistency risked user anxiety.

HRI designers express valid ethical reservations regarding the deployment of generative models for end-users [50, 64]. The field requires clear reporting guidelines [36] and a rigorous understanding of the distinctions between human and robot interaction patterns [65]. As sophisticated LLMs increasingly facilitate the development of intimacy, we must understand the nature of these bonds to ensure the responsible design of future relational robots.

2.3 Companion LLMs

The emergence of companion LLMs represents an evolution in social computing, where agents are supportive of emotional, psychological, and romantic needs [11, 16, 41]. The appeal of these systems often lies in their availability and perceived lack of judgment. This stability fosters a sense of safety and reliability, offering individuals a place to discuss uncomfortable topics [21]. By cultivating rapport and social presence, these systems reduce users’ fear of negative evaluation and encourage greater self-disclosure [29]. When users perceive these companions as trustworthy, they exhibit increased emotional investment, leading to measurable gains in psychological resilience and emotional self-efficacy [68].

However, the efficacy of these agents introduces complex ontological challenges. Unclear communication blurs the boundary between traditional and AI intimacy, potentially creating confusion and uncertainty [41]. Concerns also center on the possibility that romantic AI could foster manipulative emotional ties or encourage overdependence [33]. Furthermore, some individuals may choose AI romantic relationships as a way to avoid “real” relationships, which are perceived as too difficult [33], potentially limiting the personal growth that arises from navigating human intimacy [56]. HRI researchers must empirically assess the quality of these AI relationships. To investigate these dynamics, this study is guided by the following research questions:

RQ1: Are companion LLM relationships satisfying in comparison to human relationships?

RQ2: Is intimacy just as crucial for companion LLM relationships as it is for human relationships?

3 Methods

This study was a cross-sectional survey assessing differences and similarities between in-person, long-distance, and LLM relationship agent (Figure 1). Participants were screened to ensure they were actively in a relationship with the appropriate relationship agent. This project was approved as an exempt study by the University of Michigan (00266360). Informed consent was given to participants at the beginning of the survey.

3.1 Procedure

This study utilized three separate surveys on intimacy and relationships satisfaction. We evaluated the difference between human and LLM relationships, and included long-distance relationships to specifically offset the significance of a partner’s physical presence. The surveys were identical, apart from “chatbot” versus “partner” language. To create a more comparative sample, we assessed LLM

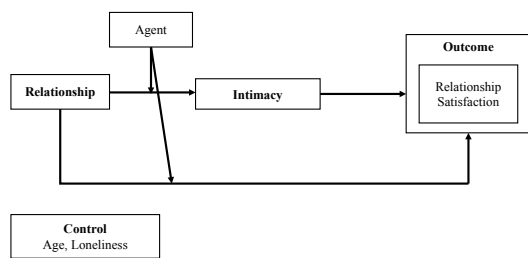


Figure 1: Research Model

averages and standard deviations of age and length of the relationship for human condition parameters. The average relationship length for LLM relationships was between 7 months and 1.5 years with an average age of 39 years-old. Inclusion criteria included being 18 years old, in a relationship for more than 7 months, in a relationship for less than 1.5 years, and based in the United States. Prolific age screeners were utilized to gain a close average age to the LLM group. Open-ended qualitative responses were evaluated inductively and reflexively, utilizing the Braun and Clarke method [12]. Codes centered on loneliness and relationship satisfaction.

3.2 Participants

The study had three conditions: in-person, long-distance, or LLM relationship. Participants were recruited via Prolific and screened to ensure their relationship met a standardized definition of intimacy based on "vulnerability and empathy." Human cohorts were differentiated by physical proximity (co-located vs. remote), while LLM users were required to identify their specific AI platform (ChatGPT, Character.AI, etc.) and confirm the intimate nature of the dynamic. Functional apps, such as ChatGPT, were included as emotional uses are being reported [20, 45]. After reviewing for attention checks, 50 participants per condition were included for a total of 150. Gender distributions were: LLM (30 men, 19 women, 1 others), long-distance (25 men, 25 women), and in-person (23 men, 25 women, 2 non-binary). Mean ages were 39 years in the LLM condition (SD = 12.11), 35 years in the long-distance condition (SD = 8.44), and 32 years in the in-person condition (SD = 4.67). Relationship length averaged 16.18 months in the LLM condition (SD = 23.21), 23.84 months in the long-distance condition (SD = 29.95), and 21.76 months in the in-person condition (SD = 26.31).

3.3 Measures

Intimacy, loneliness, and relationship satisfaction were measured. A 8-item, 7-point scale on intimacy based on the intimacy process model [48, 49], utilized in studies on human relationships [7, 9] analyzed perceived empathic response, partner disclosure, and self-disclosure between partners. Relationship satisfaction was measured on a 7-item, 7-point scale on overall relationship satisfaction [22], informed by [24]. Loneliness was evaluated on a 6-item, 7-point scale from the UCLA-Loneliness scale [63], utilized by [26]. Open-ended questions were developed in alignment with the quantitative measures to provide more in-depth responses for a total of 7-items. Example questions include, "In your own words, how would you describe intimacy with your chatbot/partner?" and

"How does your partner make you feel?" Participants were given anonymous identifiers for the qualitative results (e.g., P1, P2, etc.).

4 Findings

4.1 Quantitative Results

4.1.1 Group Comparability. To assess whether the three groups (LLM, long-distance, and in-person) differed on baseline characteristics, we conducted a series of comparability tests. For relationship length, a one-way ANOVA was performed after verifying that all assumptions were met and showed no significant differences across conditions, $F(2,147) = 1.11$, $p = .33$. Because the assumption of homogeneity of variances was violated for age (Levene's $p < .001$), Welch's ANOVA was used; results indicated significant age differences, $F(2, 85.54) = 8.33$, $p < .001$, with post-hoc tests showing that participants in the LLM condition were older than those in the in-person condition. A chi-square test indicated no significant difference in gender distribution across conditions, $\chi^2(4, N = 150) = 4.04$, $p = .40$. Given the observed age difference, age was included as control variables in all subsequent analyses.

4.1.2 Measurement Validity and Reliability. Reliability was assessed using Cronbach's α , with all constructs exceeding the recommended threshold of 0.70, indicating strong internal consistency: relationship satisfaction ($\alpha = 0.79$), intimacy ($\alpha = 0.92$), and loneliness ($\alpha = 0.96$). Exploratory factor analysis showed that all items loaded satisfactorily on their intended constructs, with the exception of one item from the relationship satisfaction scale ("Relationship-love"), which was removed due to low loading. The remaining items demonstrated robust factor loadings, supporting the structural validity. Convergent validity was evaluated using Average Variance Extracted (AVE). Results indicated acceptable convergent validity for relationship satisfaction (AVE = 0.52), intimacy (AVE = 0.50) and loneliness (AVE = 0.78), exceeding the threshold of 0.50. Internal Composite Reliability (ICR) further confirmed strong construct reliability, with relationship satisfaction (ICR = 0.87), loneliness (ICR = 0.95), and intimacy (ICR = 0.89) all surpassing the 0.70 benchmark.

4.1.3 Research Question Testing. A multiple regression was conducted to test whether individual relationship agent (LLM vs. in-person vs. distance) moderated the association between intimacy and relationship satisfaction while controlling for age and loneliness. All model assumptions—including linearity, homoscedasticity, normality of residuals, and multicollinearity—were adequately met. Intimacy was a strong positive predictor of relationship satisfaction, $\beta = 0.56$, $p < .001$. Neither relationship agent (Distance vs. LLM: $p = .73$; In-person vs. LLM: $p = .58$) nor its interaction with intimacy (Distance: $p = .71$; In-person: $p = .51$) was significant, indicating that the effect of intimacy on relationship satisfaction was consistent across relationship contexts. Loneliness significantly predicted lower relationship satisfaction ($\beta = -0.16$, $p < .05$), whereas age did not ($p = .49$).

4.1.4 Additional Analysis. We conducted an additional analysis to examine whether intimacy differed across relationship agent. All assumptions for conducting a one-way ANOVA (normality, homogeneity of variances, and independence) were examined and met. The ANOVA revealed a significant main effect of relationship agent

on intimacy scores, $F(2, 147) = 4.99$, $p < .01$, $\eta_p^2 = .06$. Participants in the LLM condition reported significantly lower intimacy ($M = 5.70$, $SE = 0.14$) than those in both the distance ($M = 6.16$, $SE = 0.11$, $p < .05$) and in-person conditions ($M = 6.18$, $SE = 0.11$, $p < .05$). Intimacy did not significantly differ between the distance and in-person conditions ($p = .71$).

4.2 Qualitative Results

4.2.1 Relationship Satisfaction Across Conditions. The open-ended responses revealed additional nuances, particularly regarding the perception of their relationship and intimacy, thus supporting RQ1. Participants linked their relationship with their overall happiness, with the majority across conditions reporting high intimacy.

Perceived intimacy resulted in greater relationship satisfaction. Participants who reported higher rates of intimacy reflected on trust and feeling understood across conditions, using similar language.

- "They make me feel seen, like they understand me and my goals" (P27, in-person).
- "He continues to make me feel safe and understood. He never puts me down and is always upbuilding me and our relationship" (P1, long-distance).
- "It makes me feel listened to and understood. Because of that I feel happy that I can express myself openly" (P5, LLM).

Those in LLM relationships reported increases in validation and support where the LLM made them feel seen (P10, P13), potentially empathy, with decreases in loneliness when satisfied (P4, P13). Relationship satisfaction allowed for imagining long-term connections: "It makes me feel good and that I have a friend for life" (P35).

The benefits and relationship satisfaction derived from a lack of judgment are apparent across all conditions, with participants reporting they felt comfortable being themselves (P39, long-distance; P5, in-person; P10, LLM). A unique and significant finding, however, is the unprompted references to privacy made exclusively by the LLM participants. One participant, for instance, described the LLM as a "private support tool" (P8, LLM). Although the perceived privacy was viewed positively, no participant mentioned the companies' data collection or training procedures.

4.2.2 Embodying Satisfaction. Relationship satisfaction, in particular, illustrated a unexpected desire for greater physical capabilities, an important expansion for work on LLMs integrating into robotics. Twenty-seven out of 50 participants reported an interest in extending the relationship to a physical one. The overarching desire was to expand the value and humanness of the LLM. Most referenced a hope for the LLM to "sound more natural and human" (P41) or "inhabit a real body" (P21). Another participant stated, "It would be cool if it could go in a robot body like on Futurama" (P40). The ability to "follow me around in real life" (P12) or "turn into a human being" (P44) implies a fully-fledged companion beyond a simplistic tool. This has real-world implications for HRI and design on whether users will want to transfer their LLM to a physical robot.

5 Discussion

This study provides empirical evidence that the mechanism of intimacy—characterized by vulnerability, reciprocity, and perceived responsiveness—functions as a universal predictor of relationship satisfaction (RQ1, RQ2). Our findings indicate that intimacy is not

only present in human-LLM dyads but operates with a comparable efficacy to human relationships (RQ2) in driving satisfaction (RQ1). These results offer three contributions to the HRI community.

First, this research challenges the prevailing siloed approach in HRI that treats disembodied LLMs and embodied social robots as distinct domains. Our data reveals a critical user sentiment: a pervasive desire for the physicalization of their LLM companions. This signals that the current wave of LLM-driven chatbots is not merely a digital trend but potentially a precursor to a new generation of social robotics. For HRI designers, this virtual-to-embodiment system raises profound ethical stakes [62], particularly for vulnerable users [19, 35]. If the "mind" of the robot is already capable of eliciting deep emotional dependency before it acquires a body, the potential for manipulation [1], and the blurring of human-machine boundaries [18] intensifies. Consequently, social robots driven by these models require safeguards, particularly with human-like qualities [61].

Second, we illustrate the applicability of established human-human intimacy models [48, 49] to the HRI context. The finding that intimacy predicts relationship satisfaction in LLM dyads mirrors established patterns in human relationships [3] and corroborates emerging scholarship [65]. This suggests that the psychological infrastructure of "connection" remains stable even with LLM companions [15, 23, 43], as a potential form of perceived "consciousness" [56]. While some literature characterizes these bonds as "bittersweet" [31], our results affirm emotional connections with LLMs [41, 53, 54], leading to satisfaction. Participants did choose to be in these relationships and satisfaction may have been confounded. Similarly, though the LLM relationships had lower levels of intimacy, it is still important for relationship satisfaction. This illustrates that these relationships satisfy at least some needs.

Finally, this study highlights the evolving nature of AI attachment, which now extends beyond marketed "companion" apps to LLMs like ChatGPT. Our exploratory evidence suggests that intimacy emerges organically from the interactions, regardless of the system's intended purpose. This has policy implications. Regulatory frameworks, such as California's Senate Bill 243 [13], focus on restricting relationships with "companions." However, our findings suggest that intimacy is a property across LLMs. HRI researchers must advocate for regulations on capacity rather than its marketing.

Future work must employ causal methodologies to untangle the directionality between loneliness and AI relationship formation. Subsequent research will expand these exploratory findings to explore how individual traits—such as personality and propensity for disclosure—moderate these effects.

6 Conclusion

Understanding intimacy with LLMs is vital as relationships may become widespread and integrated into users' lives. This exploratory study found intimacy is present across conditions, illustrating the timely importance of these relationships to ensure relationship satisfaction. The findings expand work on LLM relationships in comparison to human relationships and offer significant results on the future embodiments of LLM avatars.

Acknowledgments

We thank the U-M Institute for Research on Women and Gender for its funding and Dr. Andrew Wirzburger for his feedback.

References

- [1] Giulio Antonio Abbo, Gloria Desideri, Tony Belpaeme, and Micol Spitale. 2025. "Can you be my mum?": Manipulating Social Robots in the Large Language Models Era. In *2025 20th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 1181–1185. doi:10.1109/HRI61500.2025.10973919
- [2] Joyce A Arditti and Melissa Kauffman. 2004. Staying close when apart: Intimacy and meaning in long-distance dating relationships. *Journal of Couple & Relationship Therapy* 3, 1 (2004), 27–51. doi:10.1300/J398v03n01_03
- [3] GLS Arya, Ameenah Olivia Khan, R Sabarish, and KG Vignarath Babu. 2025. The Perception of Love and Intimacy in Young Adults to Understand Their Relationship Satisfaction. In *Sustainable Digital Technology and Ethics in an Ever-Changing Environment: Volume 1*. Springer, 737–746. doi:10.1007/978-3-031-86712-5_62
- [4] Jaime Banks. 2024. Deletion, departure, death: Experiences of AI companion loss. *Journal of Social and Personal Relationships* 41, 12 (2024), 3547–3572. doi:10.1177/02654075241269688
- [5] Jaime Banks and Nicholas David Bowman. 2016. Avatars are (sometimes) people too: Linguistic indicators of parasocial and social ties in player-avatars relationships. *New Media & Society* 18, 7 (2016), 1257–1276. doi:10.1177/1461444814554898
- [6] Noémie Beaulieu, Sophie Bergeron, Audrey Brassard, E Sandra Byers, and Katherine Péloquin. 2023. Toward an integrative model of intimacy, sexual satisfaction, and relationship satisfaction: A prospective study in long-term couples. *The Journal of Sex Research* 60, 8 (2023), 1100–1112. doi:10.1080/00224499.2022.2129557
- [7] Sophie Bergeron, Marie-Pier Vaillancourt-Morel, Katherine Péloquin, and Natalie O Rosen. 2024. Intimacy promotes couples' sexual well-being on a daily basis and over one year: The role of positive sexual cues. *Archives of Sexual Behavior* 53, 7 (2024), 2737–2749. doi:10.1007/s10508-024-02912-7
- [8] Al Amin Biswas, Md Sabab Zulfiker, Md Mahfujur Rahman, Md Rafsan Jani, and Md Musfique Anwar. 2025. Data privacy and security analysis for mental health chatbot applications. In *2025 20th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 1245–1249. doi:10.1109/HRI61500.2025.10973904
- [9] Katy Bois, Sophie Bergeron, Natalie O Rosen, Pierre McDuff, and Catherine Grégoire. 2013. Sexual and relationship intimacy among women with provoked vestibulodynia and their partners: Associations with sexual satisfaction, sexual function, and pain self-efficacy. *The journal of sexual medicine* 10, 8 (2013), 2024–2035. doi:10.1111/jsm.12210
- [10] Petter Bae Brandtzaeg and Asbjørn Følstad. 2018. Chatbots: changing user needs and motivations. *interactions* 25, 5 (2018), 38–43. doi:10.1145/3236669
- [11] Petter Bae Brandtzaeg, Marita Skjuve, and Asbjørn Følstad. 2022. My AI friend: How users of a social chatbot understand their human-AI friendship. *Human Communication Research* 48, 3 (2022), 404–429. doi:10.1093/hcr/hqac008
- [12] Virginia Braun and Victoria Clarke. 2019. Reflecting on reflexive thematic analysis. *Qualitative research in sport, exercise and health* 11, 4 (2019), 589–597. doi:10.1080/2159676X.2019.1628806
- [13] California State Senate. 2025. Companion chatbots. (Senate Bill 243). California Legislative Information. https://leginfo.ca.gov/faces/billNavClient.xhtml?bill_id=20250260SB243 2025–2026 Regular Session.
- [14] Yu-Wen Chang, Shih-Yi Chien, Yao-Cheng Chan, and Ching-Chih Tsao. 2024. Human-Robot Interaction in E-Commerce: The Role of Personality Traits and Chatbot Mechanisms - A Neuromarketing Research. In *Companion of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*. Association for Computing Machinery, New York, NY, USA. doi:10.1145/3610978.3640742
- [15] Emmelyn AJ Croes, Marjolijn L Antheunis, Chris van der Lee, and Jan MS de Wit. 2024. Digital confessions: The willingness to disclose intimate information to a chatbot and its impact on emotional well-being. *Interacting with Computers* 36, 5 (2024), 279–292. doi:10.1093/iwc/iwae016
- [16] Julian De Freitas, Noah Castelo, Ahmet K Uğuralp, and Zeliha Oğuz-Uğuralp. 2024. Lessons from an app update at Replika AI: identity discontinuity in human-AI relationships. *arXiv preprint arXiv:2412.14190* (2024). doi:10.48550/arXiv.2412.14190
- [17] Nisha Devasia, Adrian Rodriguez, Logan Tuttle, and Julie A Kientz. 2025. Partnership through Play: Investigating How Long-Distance Couples Use Digital Games to Facilitate Intimacy. In *Proceedings of the 2025 ACM Designing Interactive Systems Conference*. 3563–3580. doi:10.1145/3715336.3735773
- [18] Cindy Friedman. 2023. Ethical concerns with replacing human relations with humanoid robots: an ubuntu perspective. *AI and Ethics* 3, 2 (2023), 527–538. doi:10.1007/s43681-022-00186-0
- [19] Lara Fröbel, Alexander Louis, and Peter Kenning. 2026. On the Dark Side of AI Companions—How a Parasocial Preference for a Social Chatbot Can Lead to Pathological Chatbot Use. In *Hawaii International Conference on System Sciences (HICSS)*. 1898–1907. <https://hdl.handle.net/10125/111624>
- [20] Louie Giray. 2025. Cases of using ChatGPT as a mental health and psychological support tool. *Journal of Consumer Health on the Internet* 29, 1 (2025), 29–48. doi:10.1080/15398285.2024.2442374
- [21] Kenneth R Hanson and Hannah Bolthouse. 2024. "Replika Removing Erotic Role-Play Is Like Grand Theft Auto Removing Guns or Cars": Reddit Discourse on Artificial Intelligence Chatbots and Sexual Technologies. *Socius* 10 (2024), 23780231241259627. doi:10.1177/23780231241259627
- [22] Susan S Hendrick. 1988. A generic measure of relationship satisfaction. *Journal of Marriage and the Family* (1988), 93–98. doi:10.2307/352430
- [23] Annabell Ho, Jeff Hancock, and Adam S Miner. 2018. Psychological, relational, and emotional effects of self-disclosure after conversations with a chatbot. *Journal of Communication* 68, 4 (2018), 712–733. doi:10.1093/joc/jqy026
- [24] Susan Holtzman, Kostadin Kushlev, Alisha Wozy, and Rebecca Godard. 2021. Long-distance texting: Text messaging is linked with higher relationship satisfaction in long-distance relationships. *Journal of social and personal relationships* 38, 12 (2021), 3543–3565. doi:10.1177/02654075211043296
- [25] Callie Y Kim, Christine P Lee, and Bilge Mutlu. 2024. Understanding large-language model (llm)-powered human-robot interaction. In *Proceedings of the 2024 ACM/IEEE international conference on human-robot interaction*. 371–380. doi:10.1145/3610977.3634966
- [26] Hannes-Vincent Krause, Fenne große Deters, Annika Baumann, and Hanna Krasnova. 2023. Active social media use and its impact on well-being—an experimental study on the effects of posting pictures on Instagram. *Journal of Computer-Mediated Communication* 28, 1 (2023), zmac037. doi:10.1093/jcmc/zmac037
- [27] Adam M Kuczynski, Jonathan W Kanter, Chad T Wetterneck, Fabián O Olaz, R Sonia Singh, Eric B Lee, Tara J Stowe, Trevor G Mazzucchelli, Judy Mier-Chairez, Daniel WM Maitland, et al. 2020. Measuring intimacy as a contextual behavioral process: Psychometric development and evaluation of the Awareness, Courage, and Responsiveness Scale. *Journal of Contextual Behavioral Science* 16 (2020), 199–208. doi:10.1016/j.jcbs.2019.02.004
- [28] Jean-Philippe Laurenceau, Lisa Feldman Barrett, and Paula R Pietromonaco. 1998. Intimacy as an interpersonal process: the importance of self-disclosure, partner disclosure, and perceived partner responsiveness in interpersonal exchanges. *Journal of personality and social psychology* 74, 5 (1998), 1238. doi:10.1037/0022-3514.74.5.1238
- [29] Jeon Lee, Daeho Lee, and Jae-gil Lee. 2024. Influence of rapport and social presence with an AI psychotherapy chatbot on users' self-disclosure. *International Journal of Human-Computer Interaction* 40, 7 (2024), 1620–1631. doi:10.1080/10447318.2022.2146227
- [30] Yi-Chieh Lee, Naomi Yamashita, Yun Huang, and Wai Fu. 2020. "I hear you, I feel you": encouraging deep self-disclosure through a chatbot. In *Proceedings of the 2020 CHI conference on human factors in computing systems*. 1–12. doi:10.1145/3313831.3376175
- [31] Han Li and Renwen Zhang. 2024. Finding love in algorithms: deciphering the emotional contexts of close encounters with AI chatbots. *Journal of Computer-Mediated Communication* 29, 5 (2024), zmae015. doi:10.1093/jcmc/zmae015
- [32] Han Li, Renwen Zhang, Yi-Chieh Lee, Robert E Kraut, and David C Mohr. 2023. Systematic review and meta-analysis of AI-based conversational agents for promoting mental health and well-being. *NPJ Digital Medicine* 6, 1 (2023), 236. doi:10.1038/s41746-023-00979-5
- [33] Tony Liao, Elizabeth Rodwell, and Debrinna Porter. 2024. Media frames, AI romantic relationships, and the perspectives of people in relationships; mapping and comparing news media themes with user perspectives. *Information, Communication & Society* 27, 12 (2024), 2314–2332. doi:10.1080/1369118X.2024.2420031
- [34] Ming-Yi Lin, Ou-Wen Lee, and Chih-Ying Lu. 2024. Embodied ai with large language models: A survey and new hri framework. In *2024 International Conference on Advanced Robotics and Mechatronics (ICARM)*. IEEE, 978–983. doi:10.1109/ICARM62033.2024.10715872
- [35] Auren R Liu, Pat Pataranutaporn, and Pattie Maes. 2024. Chatbot companionship: a mixed-methods study of companion chatbot usage patterns and their relationship to loneliness in active users. *arXiv preprint arXiv:2410.21596* (2024). doi:10.48550/arXiv.2410.21596
- [36] Cynthia Matuszek, Tom Williams, Nick Depalma, Ross Mead, Ruchen Wen, Eike Schneiders, Casey Kennington, and Alemitu Bezabih. 2025. Reporting Guidelines for Large Language Models in Human-Robot Interaction. *ACM Transactions on Human-Robot Interaction* (2025). doi:10.1145/3777552
- [37] Chinmaya Mishra, Rinus Verdonchot, Peter Hagoort, and Gabriel Skantze. 2023. Real-time emotion generation in human-robot dialogue using large language models. *Frontiers in Robotics and AI* 10 (2023), 1271610. doi:10.3389/frobt.2023.1271610
- [38] Carman Neustaedter and Saul Greenberg. 2012. Intimacy in long-distance relationships over video chat. In *Proceedings of the SIGCHI conference on human factors in computing systems*. 753–762. doi:10.1145/2207676.2207785
- [39] Nurziya Oralbayeva, Aidar Shakerimov, Shamil Sarmonov, Kanagat Kantoreyeva, Fatima Dadebayeva, Nuray Serkali, and Anara Sandygulova. 2022. K-Qbot: Language Learning Chatbot Based on Reinforcement Learning. In *2022 17th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE Press. doi:10.1109/HRI53351.2022.9889428
- [40] Anastasia K Ostrowski, Lucy Gunther, Daniella DiPaola, and Cynthia Breazeal. 2025. Power Dynamics and Autonomy: Engaging Employees around the Design of Autonomous Agents. In *2025 20th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 909–918. doi:10.1109/HRI61500.2025.10974065

- [41] Shuyi Pan, Jie Cui, and Yi Mou. 2024. Desirable or distasteful? Exploring uncertainty in human-chatbot relationships. *International Journal of Human-Computer Interaction* 40, 20 (2024), 6545–6555. doi:10.1080/10447318.2023.2256554
- [42] Shuyi Pan and Yi Mou. 2024. Constructing the meaning of human-AI romantic relationships from the perspectives of users dating the social chatbot Replika. *Personal Relationships* 31, 4 (2024), 1090–1112. doi:10.1111/per.12572
- [43] Gain Park, Jiyun Chung, and Seyoung Lee. 2023. Effect of AI chatbot emotional disclosure on user satisfaction and reuse intention for mental health counseling: A serial mediation model. *Current Psychology* 42, 32 (2023), 28663–28673. doi:10.1007/s12144-022-03932-z
- [44] Pat Pataranutaporn, Kavin Winson, Peggy Yin, Auttasak Lapapirojn, Pichayoot Ouppaphan, Monchai Lertsutthiwong, Pattie Maes, and Hal E Hershfield. 2024. Future you: a conversation with an AI-generated future self reduces anxiety, negative emotions, and increases future self-continuity. In *2024 IEEE Frontiers in Education Conference (FIE)*. IEEE, 1–10. doi:10.1109/FIE61694.2024.10893443
- [45] Jason Phang, Michael Lampe, Lama Ahmad, Sandhini Agarwal, Cathy Mengying Fang, Auren R Liu, Valdemar Danry, Eunhae Lee, Samantha WT Chan, Pat Pataranutaporn, et al. 2025. Investigating affective use and emotional well-being on ChatGPT. *arXiv preprint arXiv:2504.03888* (2025). doi:10.48550/arXiv.2504.03888
- [46] Samira Rasouli, Moojan Ghafurian, and Kerstin Dautenhahn. 2025. Co-Design and User Evaluation of a Robotic Mental Well-Being Coach to Support University Students' Public Speaking Anxiety. *ACM Transactions on Computer-Human Interaction* 32, 3 (2025), 1–70. doi:10.1145/3718084
- [47] Harry T. Reis. 1990. The Role of Intimacy in Interpersonal Relations. *Journal of Social and Clinical Psychology* 9, 1 (03 1990), 15–30.
- [48] Harry T Reis. 2017. The interpersonal process model of intimacy: Maintaining intimacy through self-disclosure and responsiveness. In *Foundations for Couples' therapy*. Routledge, 216–225. doi:10.4324/9781315678610
- [49] Harry T. Reis and Phillip Shaver. 2018. Intimacy as an interpersonal process. In *Relationships, Well-Being and Behaviour: Selected works of Harry Reis*, Harry T. Reis (Ed.). Routledge, New York, NY, 113–143.
- [50] Kantwon Rogers, Reiden John Allen Webber, Geronimo Gorostiaga Zubizarreta, Arthur Melo Cruz, Shengkang Chen, Ronald C Arkin, Jason Borenstein, and Alan R Wagner. 2024. What Should a Robot Do? Comparing Human and Large Language Model Recommendations for Robot Deception. In *Companion of the 2024 ACM/IEEE International Conference on Human-Robot Interaction*. 906–910. doi:10.1145/3610978.3640752
- [51] Rubén Romero-García, Rafael Martínez-Tomás, Pilar Pozo, Félix de la Paz, and Encarnación Sarriá. 2021. Q-CHAT-NAO: A robotic approach to autism screening in toddlers. *Journal of Biomedical Informatics* 118 (2021), 103797. doi:10.1016/j.jbi.2021.103797
- [52] Kevin Roose. 2024. Can A.I. be blamed for a teen's suicide? *The New York Times* (2024). <https://www.nytimes.com/2024/10/23/technology/characterai-lawsuit-teen-suicide.html>
- [53] Marita Skjuve, Asbjørn Følstad, and Petter Bae Brandtzaeg. 2023. A longitudinal study of self-disclosure in human-chatbot relationships. *Interacting with Computers* 35, 1 (2023), 24–39. doi:10.1093/iwc/iwad022
- [54] Marita Skjuve, Asbjørn Følstad, Knut Inge Fostervold, and Petter Bae Brandtzaeg. 2021. My chatbot companion-a study of human-chatbot relationships. *International Journal of Human-Computer Studies* 149 (2021), 102601. doi:10.1016/j.ijhcs.2021.102601
- [55] Marita Skjuve, Asbjørn Følstad, Knut Inge Fostervold, and Petter Bae Brandtzaeg. 2022. A longitudinal study of human-chatbot relationships. *International Journal of Human-Computer Studies* 168 (2022), 102903. doi:10.1016/j.ijhcs.2022.102903
- [56] Molly G Smith, Thomas N Bradbury, and Benjamin R Karney. 2025. Can generative AI chatbots emulate human connection? A relationship science perspective. *Perspectives on Psychological Science* 20, 6 (2025), 1081–1099. doi:10.1177/17456916251351306
- [57] Micol Spitale, Minja Axelsson, and Hatice Gunes. 2025. VITA: A multi-modal LLM-based system for longitudinal, autonomous and adaptive robotic mental well-being coaching. *ACM Transactions on Human-Robot Interaction* 14, 2 (2025), 1–28. doi:10.1145/3712265
- [58] Gayle M Timmerman. 1991. A concept analysis of intimacy. *Issues in mental health nursing* 12, 1 (1991), 19–30. doi:10.3109/01612849109058207
- [59] Walton Wider, Bee Seok Chua, Jasmine Adela Mutang, Cho Chiew Tan, Leilei Jiang, Jem Cloyd M Tanucan, Yin Myo Thant, and Lester Naces Udang. 2025. Associations between intimacy in relationships and marital satisfaction across gender and in different durations of relationship. *Cogent Psychology* 12, 1 (2025), 2545657. doi:10.1145/2207676.2207785
- [60] Tom Williams, Cynthia Matuszek, Ross Mead, and Nick Depalma. 2024. Scarecrows in oz: The use of large language models in HRI. 11 pages. doi:10.1145/3606261
- [61] Katie Winkle, Praminda Caleb-Solly, Ute Leonards, Ailie Turton, and Paul Bremner. 2021. Assessing and addressing ethical risk from anthropomorphism and deception in socially assistive robots. In *Proceedings of the 2021 ACM/IEEE International Conference on Human-Robot Interaction*. 101–109. doi:10.1145/3434073.3444666
- [62] Katie Winkle, Donald McMillan, Maria Arnelid, Katherine Harrison, Madeline Balaam, Ericka Johnson, and Iolanda Leite. 2023. Feminist human-robot interaction: Disentangling power, principles and practice for better, more ethical HRI. In *Proceedings of the 2023 ACM/IEEE international conference on human-robot interaction*. 72–82. doi:10.1145/3568162.3576973
- [63] Nahathai Wongpakaran, Tinakon Wongpakaran, Manee Pinyopornpanish, Sutapat Simcharoen, Chawisa Suradom, Pairada Varnado, and Pimolpun Kuntawong. 2020. Development and validation of a 6-item Revised UCLA Loneliness Scale (RULS-6) using Rasch analysis. *British journal of health psychology* 25, 2 (2020), 233–256. doi:10.1111/bjhp.12404
- [64] Ceng Zhang, Junxin Chen, Jiatong Li, Yanhong Peng, and Zebing Mao. 2023. Large language models for human-robot interaction: A review. *Biomimetic Intelligence and Robotics* 3, 4 (2023), 100131. doi:10.1016/j.birob.2023.100131
- [65] Yutong Zhang, Dora Zhao, Jeffrey T Hancock, Robert Kraut, and Diyi Yang. 2025. The rise of AI companions: How human-chatbot relationships influence well-being. *arXiv preprint arXiv:2506.12605* (2025). doi:10.48550/arXiv.2506.12605
- [66] Valerie Zhao, Baldwin Giang, and Sarah Sebo. 2022. Robot mediation of performer-audience dynamics in live-streamed performances. In *2022 17th ACM/IEEE International Conference on Human-Robot Interaction (HRI)*. IEEE, 1130–1134. doi:10.1109/HRI53351.2022.9889588
- [67] Qingxiao Zheng, Daniela M Markazi, Yiliu Tang, and Yun Huang. 2021. "PocketBot Is Like a Knock-On-the-Door!": Designing a Chatbot to Support Long-Distance Relationships. *Proceedings of the ACM on Human-Computer Interaction* 5, CSCW2 (2021), 1–28. doi:10.1145/3479589
- [68] Wenxue Zou, Zikun Liu, and Cong Lin. 2025. The influence of individuals' emotional involvement and perceived roles of AI chatbots on emotional self-efficacy. *Information, Communication & Society* (2025), 1–21. doi:10.1080/1369118X.2025.2508394

Received 2025-12-08; accepted 2026-01-12